

## Service Differentiation and QoS in WLANs (802.11e)

Renato Lo Cigno  
www.disi.unitn.it/locigno/

---

---

---

---

---

---

---

---

### ...Copyright

Quest'opera è protetta dalla licenza *Creative Commons NoDerivs-NonCommercial*. Per vedere una copia di questa licenza, consultare:  
<http://creativecommons.org/licenses/nd-nc/1.0/>  
oppure inviare una lettera a:  
*Creative Commons, 559 Nathan Abbott Way, Stanford, California 94305, USA.*

This work is licensed under the *Creative Commons NoDerivs-NonCommercial* License. To view a copy of this license, visit:  
<http://creativecommons.org/licenses/nd-nc/1.0/>  
or send a letter to  
*Creative Commons, 559 Nathan Abbott Way, Stanford, California 94305, USA.*



---

---

---

---

---

---

---

---

### What's the Problem in PCF

- PCF designed to provide QoS to real-time traffic
- What makes QoS in 802.11 difficult?
  1. Unpredictable beacon delay
    - A WSTA stops all timers at TBTT thus it does not initiate a transmission after TBTT; however, it continues on-going transmissions, hence beacon may be delayed
    - The larger the frame size, the longer the delay (up to 4.9 ms)
  2. Unknown transmission duration
  3. Static Polling List



---

---

---

---

---

---

---

---

## Quality-of-Service Provisioning: Some Terminology

- **Definition:** A **flow** is a packet stream from a source to a destination, belonging to the same application
- **Definition:** **QoS** is a set of service requirements to be met by the network while transporting a flow
- Typical QoS metrics include: available bandwidth, packet loss rate, estimated delay, packet jitter, hop count and path reliability



Renato.LoCigno@dit.unitn.it

Thanks: TLC Networks Group – Politecnico di Torino

Nomadic Communications: 802.11e 4

---

---

---

---

---

---

---

---

---

---

## QoS in Wireless Networks

- QoS schemes in wired networks are NOT suitable for wireless networks
  - e.g., current wired-QoS routing algorithms require accurate link state and topology information
  - time-varying capacity of wireless links, limited resources and node mobility make maintaining accurate information difficult
- Supporting QoS in wireless networks is an even more difficult challenge



Renato.LoCigno@dit.unitn.it

Thanks: TLC Networks Group – Politecnico di Torino

Nomadic Communications: 802.11e 5

---

---

---

---

---

---


---

---

---

---

## Service Differentiation MAC Schemes that lead to 802.11e

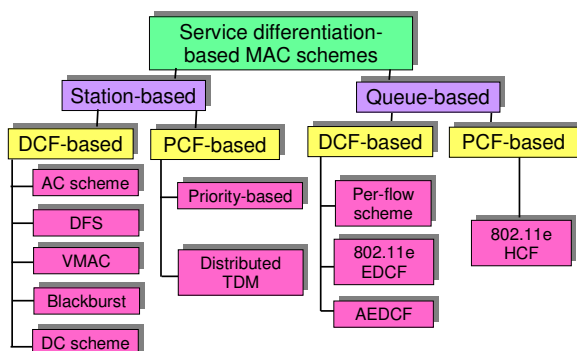

Renato.LoCigno@dit.unitn.it

Thanks: TLC Networks Group – Politecnico di Torino

Nomadic Communications: 802.11e 6

---

---

---

---

---

---

---

---

---

---

## A QoS Standard for WLANs: IEEE 802.11e

- The IEEE 802.11 TG E was formed in 1999
- The Project Authorization Request (PAR) was approved in March 2000
- **Scopes of the IEEE 802.11 Task Group E**
  - Enhance the current 802.11 MAC to improve and manage QoS
  - Consider efficiency enhancements in the areas of DCF and PCF
  - Provide different classes of service (8 TCs)



Renato.LoCigno@dit.unitn.it

Thanks: TLC Networks Group – Politecnico di Torino

Nomadic Communications: 802.11e 7

---

---

---

---

---

---

---

---

## 802.11e Standard

- Released last autumn
- PHY unchanged (use a/b/g)
- MAC Enhanced: *Goals*
  - Traffic Differentiation and Guarantee
  - TSPEC and CAC
  - Interoperation with legacy 802.11



Renato.LoCigno@dit.unitn.it

Thanks: TLC Networks Group – Politecnico di Torino

Nomadic Communications: 802.11e 8

---

---

---

---

---

---

---

---

## 802.11e: QSTA, QAP, QBSS, HCF

- A station using 802.11e is called *QoS Enhanced Station (QSTA)*
- An AP using 802.11e is called *QoS Access Point (QAP)*
- QSTA e QAP works within a *QoS Basic Service Set (QBSS)*
- The two coordination functions DCF e PCF are substituted by a single *Hybrid Coordination Function (HCF)*



Renato.LoCigno@dit.unitn.it

Thanks: TLC Networks Group – Politecnico di Torino

Nomadic Communications: 802.11e 9

---

---

---

---

---

---

---

---

## TXOPs

- TXOP: Transmission Opportunity
  - Time interval during which a QSTA has the right to transmit
  - It is characterized by a starting time and a maximum duration (TXOP\_Limit)
  - Used in both CP and CFP



Renato.LoCigno@dit.unitn.it

Thanks: TLC Networks Group – Politecnico di Torino

Nomadic Communications: 802.11e 10

---

---

---

---

---

---

---

---

## 802.11e Coordination Function

- Hybrid Coordination Function, alternates:
  - EDCA (Enhanced Distributed Channel Access), contention based, conceived to support legacy stations and provide some *stochastic* level of differentiation
  - HCCA (HCF Coordinated Channel Access), polling based, provides collision free periods with guaranteed assignment and *deterministic* differentiation



Renato.LoCigno@dit.unitn.it

Thanks: TLC Networks Group – Politecnico di Torino

Nomadic Communications: 802.11e 11

---

---

---

---

---

---

---

---

## 802.11e QoS Mechanisms

802.11e proposes a new access scheme: Hybrid Coordination Function (HCF), composed of two coordination functions

- Enhanced Distributed Channel Access (EDCA)
  - A basis layer of 802.11e; operates in CP
- HCF Controlled Channel Access (HCCA)
  - HCCA operates in CFP



Renato.LoCigno@dit.unitn.it

Thanks: TLC Networks Group – Politecnico di Torino

Nomadic Communications: 802.11e 12

---

---

---

---

---

---

---

---

## 802.11e QoS Mechanisms

- MAC-level FEC (Hybrid I and II)
- Ad hoc features:
  - Direct Communication / Side Traffic
  - WARP: Wireless Address Resolution Protocol
  - AP mobility



---

---

---

---

---

---

---

---

## 802.11e: Hybrid Coordinator

- Within a QBSS a centralized controller is needed to coordinate all QSTAs. This is the *Hybrid Coordinator (HC)*, normally implemented within a QAP
- An HC has the role of splitting the transmission superframe in two phases continuously alternating:
  - *Contention Period (CP)*, where QSTAs contend for the channel using EDCA
  - *Contention-Free Period (CFP)*, where HC defines who is going to use the channel and for what time with a collision free polling protocol



---

---

---

---


---

---

---

---

## MAC 802.11e: HCCA

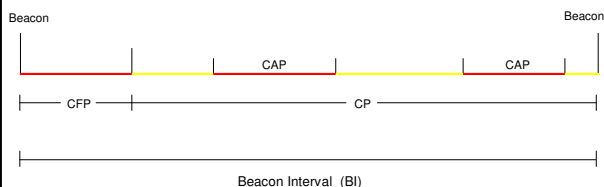

---

---

---

---

---

---

---

---

## 802.11e: EDCF

- The *Enhanced Distributed Coordination Function* (EDCF) define a differentiated access scheme based on an improved (yet complex) contention scheme
- It is an evolution of *CSMA/CA DCF*, with the add-on of traffic classes to support QoS and differentiate traffic
- EDCF is designed to support frames with the same 8 priority levels of 802.1d, but mapping them on only 4 access categories
- Every frame passed to the MAC layer from above, must have a priority identifier (from 0 to 7), called *Traffic Category Identification (TCId)*



---

---

---

---

---

---

---

---

## 802.11e: EDCF

- TCId is written in one header field of the MAC frame
- Each 802.11e QSTA & QAP MUST have four separated AC queues
- Each AC queue is FIFO and behaves independently from the others as far as the *CSMA/CA MAC* protocol is concerned



---

---

---

---


---

---

---

---

## 802.11e: EDCF

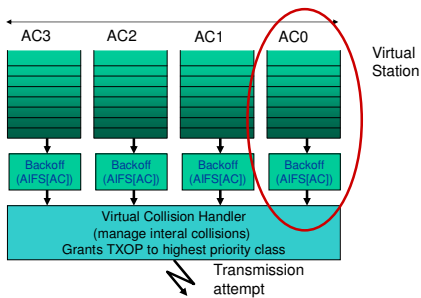

---

---

---

---

---

---

---

---

## 802.11e: EDCF

- ACs are differentiated based on their CSMA parameters:
  - IFS
  - CWmin
  - CWmax
  - Backoff exponent



---

---

---

---

---

---

---

---

## 802.11e: EDCF

- Higher priority ACs are assigned parameters that result in shorter CWs so that a statistical advantage is gained in accessing the channel
- Protocol parameters become vectors
  - CWmin[AC]
  - CWmax[AC]
  - AIFS[AC]
  - bck[AC]
- CW[AC,†] is derived with the usual CSMA/CA rules



---

---

---

---

---

---

---

---

## 802.11e: EDCF

- Arbitration InterFrame Space (AIFS) substitute the common DIFS
- Each AIFS is at least DIFS long
- Before entering the backoff procedure each *Virtual Station* will have to wait AIFS[AC], instead of DIFS



---

---

---

---


---

---

---

---

## Arbitration IFS (AIFS)

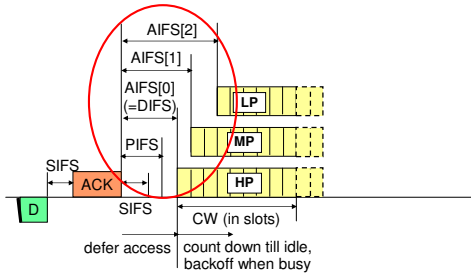

802.11a: slot=9 μs, SIFS=6 μs, PIFS=15 μs, DIFS=24 μs, AIFS ≥34 μs

---

---

---

---

---

---

---

---

---

---

## Contention Window

- $CW_{min}[AC]$  and  $CW_{max}[AC]$
- Contention Window update:

$$CW_{new}[AC] = (CW_{old}[AC] + 1) \cdot bck - 1$$

---

---

---

---

---

---


---

---

---

---

## Backoff

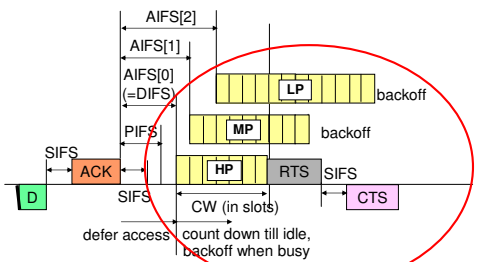

802.11a: slot=9 μs, SIFS=16 μs, PIFS=25 μs, DIFS=34 μs, AIFS ≥34 μs

---

---

---

---

---

---

---

---

---

---



## Virtual Stations

- Each AC queue behaves like a different **virtual station** (independent sensing and backoff)
- If the backoff counters of two or more parallel ACs in the same QSTA reach 0 at the same time, a scheduler inside the QSTA avoids virtual collision by **granting the TXOP** to the AC with the highest UP
- The lowest priority colliding behaves as if there were an external collision



---

---

---

---

---

---

---

---

## 802.11e: EDCF – Beacon Frames

- Values of  $AIFS[AC]$ ,  $CWmin[AC]$  e  $CWmax[AC]$  are determined by the QAP and transmitted within beacon frames (normally every 100 msec)
- QSTAs must abide to the received parameters
- QSTAs may use these parameters to chose the QAP the prefer to connect to (estimate of the expected performance)



---

---

---

---

---

---

---

---

## 802.11e: EDCF – Virtual Collisions

- Every AC within a QSTA behaves as if it were an independent station, with its own MAC parameters  $AIFS[AC]$  e  $CW[AC]$
- So Virtual Stations (AC queues) within a QSTA contend for the channel
- Internal collisions between different ACs are solved virtually, without loss of resources
- The TXOP goes to the highest priority AC and the others behave as if there was a real collision



---

---

---

---

---

---

---

---



## EDCA Bursting

- Once the station has gained access to the medium, it can be allowed to send **more than one frame** without contending again
- The station cannot transmit longer than **TXOP\_Limit**
- **ACK frame by frame or Burst ACK**
- **SIFS** is used between packets (to avoid collisions)



---

---

---

---

---

---

---

---

---

---

## EDCA Bursting: Pros / Cons

- **Pros**
  - Reduces network **overhead**
  - **Increases throughput** (SIFS and burst ACKs)
  - **Better fairness** among the same priority queues: independently of the frame size, a QSTA gets a TXOP every time it wins a contention
    - E.g., STA A uses 500 B frame; STA B uses 1K B frame. Thus B would get higher throughput in 802.11, while in 802.11e both can get approximately same throughput



---

---

---

---

---

---

---

---

---

---

## EDCA Bursting: Pros / Cons

- **Cons**
  - Possible increasing of **delay jitter**
  - TXOP\_Limit should not be longer than the time required for transmitting the largest data frame
- In any case EDCA does not solve the **downlink/uplink unfairness problem**



---

---

---

---

---

---

---

---

---

---

### 802.11e: HCF

- HC may allocate TXOPs to himself (QAP) or to other QSTAs
- Self allocation is done to transmit MSDUs, allocation of resources may solve the uplink/downlink unfairness
- Allocation to AP can be done after a Point coordination InterFrame Space (PIFS) con  $PIFS < DIFS$
- HC (QAP) has priority over other stations and may interrupt a CP to start a CFP transmitting a Poll frame



---

---

---

---

---

---

---

---

### 802.11e: HCF

- Time is divided between contention free periods (CFP) and contention periods (CP), that are alternated roughly cyclically
- A sequence CFP + CP defines a Periodic Superframe of 802.11e
- The CP can be interrupted by other contention free periods called CAPs



---

---

---

---


---

---

---

---

### 802.11e: HCF

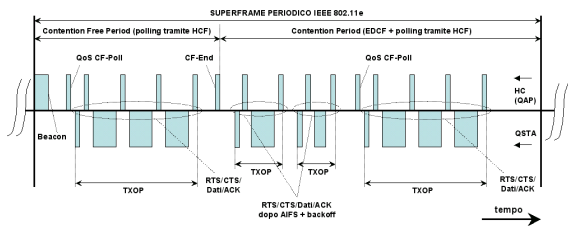

---

---

---

---

---

---

---

---



### 802.11e: HCF – QoS CFPoll Frame

- QoS CF-Poll frame was introduced with the 802.11e amendment, for backward compatibility it contains a NAV field the legacy stations can use to avoid interfering
- NAV specify the whole TXOP duration
- Legacy stations in HCF can only use the CP period



---

---

---

---

---

---

---

---

### 802.11e: HCF – Controlled Content.

- Is a mix between polling and contention based
- Should guarantee better performances than contention during congestions periods
- The *Controlled Contention* mechanism is mandatory for QAP an optional for QSTA:
  - QSTA notify QAP some allocation requests, QAP still allocate the necessary TXOPs via polling
  - Different from standard polling, because it'



---

---

---

---

---

---

---

---

### 802.11e: HCF – Controlled Content.

- QAP defines if there are resources to satisfy requests:
  - If available schedules the channel (IEEE 802.11e does not specify scheduling algorithms, these are open for research and competitive implementation)
  - The answer to stations can be acceptance, rejections or a proposal to use resources with a lower priority



---

---

---

---

---

---

---

---

## HCCA

- HCCA effectively provides policing and deterministic channel access by controlling the channel through the HC
- It is backward compatible with basic DCF/PCF
- Based on polling of QSTAs by the HC



---

---

---

---

---

---

---

---

## HCCA

### Crucial features of HCCA

- HCCA operates in CP and CFP
- Uses TXOPs which are granted through HC (in HCCA!)
  - HC allocates TXOPs by using QoS CF-Poll frames
  - In CPs, the time interval during which TXOPs are polled by HC is called CAP (Controlled Access Period)
  - 8 Traffic Categories (TCs)



---

---

---

---

---

---

---

---

## HC Behavior in HCCA

- According to HCCA:
  - HC may allocate TXOPs to itself to transmit MSDUs whenever it wants, however only after having sensed the channel idle for PIFS
  - In CP, the HC can send the CF-Poll frame after a PIFS idle period, thus starting a CAP
  - In CFP, only the HC can grant TXOPs to QSTAs by sending the CF-Poll frame
  - The CFP ends after the time announced by HC in the beacon frame or by the CF-End frame from HC



---

---

---

---

---

---

---

---

## QSTA Behavior in HCCA

- A QSTA behaves as follows
  - In CP QSTAs can gain a TXOP thanks to a CF-Poll frame issued by HC during CAPs, otherwise they can use EDCA
  - In CFP, QSTAs do not attempt accessing the channel on their own but wait for a CF-Poll frame from the HC
- The HC indicates the TXOP duration to be used in the CF-Poll frame (QoS-control field)
  - Legacy stations kept silent by NAV whenever they detect a CF-Poll frame




---

---

---

---

---

---


---

---

---

---

## 802.11e Superframe

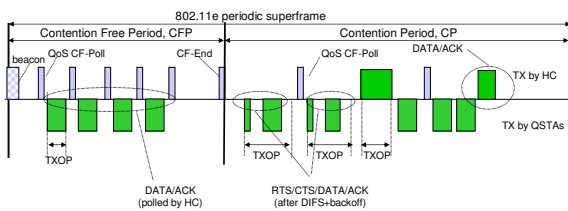

During the CP, a TXOP may begin because:

- The medium is determined to be available under EDCA rules (EDCA-TXOP)
- The STA receives a special polling frame from HC (polled-TXOP)




---

---

---

---

---

---

---

---

---

---

## Polling in HCCA

- Polling list is a crucial key in HCCA
  - Traffic scheduling (i.e., how QSTAs are polled) is not specified
  - QSTAs can send updates to the HC on their queue size as well as on the desired TXOP, (through the QoS control field in data frames)
  - QSTAs can send ADDTS requests to initiate a new traffic stream




---

---

---

---

---

---

---

---

---

---



## Traffic Signaling

- Two types of signaling traffic are supported:
  - Connectionless queue state indicator
    - E.g., Arrival rate measurement: notification and not negotiation between **peer entities** is used
  - TSPEC (Traffic Specification) between HC and QSTAs
    - E.g., service negotiation and resource reservation



---

---

---

---

---

---

---

---

## Traffic Signaling

- TSPEC are the base for CAC
- QoS without CAC is impossible
- QoS is granted to flows not to packets
- Flows are persistent (normally)
- Flows can be predicted (sometimes)



---

---

---

---

---

---

---

---

## Resource Scheduling

- Not essential to backward compatibility
  - The standard has just a reference impl. (SS)
- HCF is implemented in the AP
  - HCCA scheduling is a function of HCF
- Requirements of traffic flows are contained in the *Traffic Specifications* (TSPEC):
  - Maximum, minimum and mean datarate
  - Maximum and nominal size of the MSDUs
  - Maximum Service Interval and **Delay Bound**
  - Inactivity Interval
  - ...



---

---

---

---

---

---

---

---

## EDCA Differentiation HCCF Scheduling

Renato Lo Cigno  
[www.disi.unitn.it/locigno/didattica/NC/](http://www.disi.unitn.it/locigno/didattica/NC/)

---

---

---

---

---

---

---

---

### ...Copyright

Quest'opera è protetta dalla licenza *Creative Commons NoDerivs-NonCommercial*. Per vedere una copia di questa licenza, consultare:  
<http://creativecommons.org/licenses/nd-nc/1.0/>  
oppure inviare una lettera a:  
*Creative Commons, 559 Nathan Abbott Way, Stanford, California 94305, USA.*

This work is licensed under the *Creative Commons NoDerivs-NonCommercial* License. To view a copy of this license, visit:  
<http://creativecommons.org/licenses/nd-nc/1.0/>  
or send a letter to  
*Creative Commons, 559 Nathan Abbott Way, Stanford, California 94305, USA.*



Renato.LoCigno@dit.unitn.it  
Thanks: TLC Networks Group – Politecnico di Torino  
Nomadic Communications: 802.11e 53

---

---

---

---

---

---

---

---

### Thanks & Disclaimer

- These slides and results are based on the following paper
  - "Performance Evaluation of Differentiated Access Mechanisms Effectiveness in 802.11 Networks", Ilenia Tinnirello, Giuseppe Bianchi, Luca Scalia, IEEE Globecom 2004.
- As such they must be considered examples of the possible performances and tradeoffs
- Thanks to Bianchi and all the other authors for providing copy of the papers graphics and slides



Renato.LoCigno@dit.unitn.it  
Thanks: TLC Networks Group – Politecnico di Torino  
Nomadic Communications: 802.11e 54

---

---

---

---

---

---

---

---

## EDCA or HCCA?

- How does EDCA support differentiation?
- Is this enough for standard purposes?
- Are parameters easy to tune and universal?
  
- How can HCCA polling-based scheduling be implemented?
- Do we need to use the feedback from the STA?
- How can the traffic be described?



Renato.LoCigno@dit.unitn.it  
Thanks: TLC Networks Group – Politecnico di Torino

Nomadic Communications: 802.11e 55

---

---

---

---

---

---

---

---

## Performance Evaluation of Differentiated Access Mechanisms Effectiveness in 802.11 Networks

G. Bianchi, I. Tinnirello, L. Scalia

presented @ Globecom 2004

---

---

---

---

---

---

---

---

## QoS Support issues in legacy 802.11

- DCF is long term fair
  - Equal channel access probability among the stations
  - Averagely, the same channel holding time (for homogeneous packet sizes)
    - Solution: differentiate packet sizes?
    - Solution: differentiate channel holding times?
- NO WAY! QoS is not a matter of how long I hold the channel
  - It means more...
    - Need to manage access delay problems for real-time apps!!!
    - Need to modify 802.11 channel access fairness!!!



Renato.LoCigno@dit.unitn.it  
Thanks: TLC Networks Group – Politecnico di Torino

Nomadic Communications: 802.11e 57

---

---

---

---

---

---


---

---



### CWmax Differentiation (1)

- $CW_{max}(A) < CW_{max}(B)$ 
  - Once reached  $CW_{max}$  (repeated collisions), A gets access priority over B

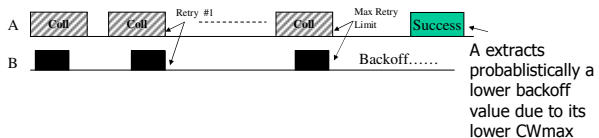


---

---

---

---

---

---


---

---

---

---

### CWmax Differentiation (2)

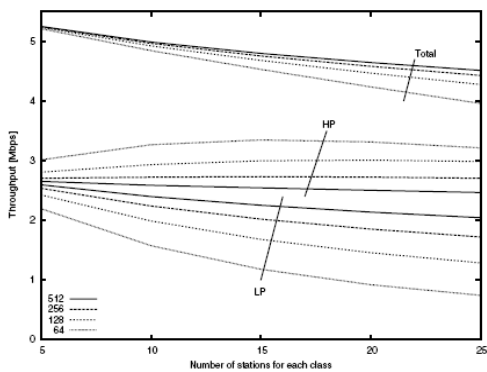


---

---

---

---

---

---


---

---

---

---

### CWmax Differentiation (3)



- Low throughput differentiation
  - Only with  $CW_{max}=64$  effective
  - @ low loads poor performance
    - Few collisions
- Inefficient channel usage
  - Consecutive Collisions are needed for the differentiation effect
  - Overall throughput suffers @ high loads

---

---

---

---

---

---

---


---

---

---

## PF Differentiation (1)

- $PF(A) < PF(B)$ 
  - once a collision occurs, station A has probabilistically an higher chance to extract a lower backoff value, thus it may retransmits first.

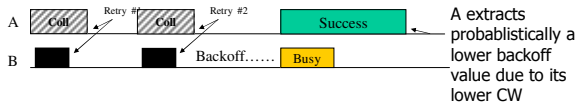


---

---

---

---

---

---


---

---

---

---

## PF Differentiation (2)

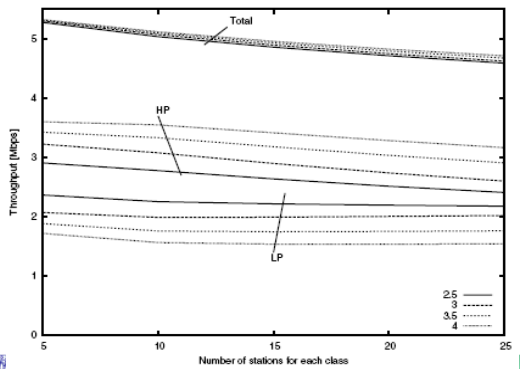


---

---

---

---

---

---


---

---

---

---

## PF Differentiation (3)



- PF is greater than 2 for LP stations.
- $CW_{new} = PF * CW_{old}$
- It is sufficient a single collision to begin the differentiation process.
- Impossible to force LP traffic to zero!
  - After a packet successful transmission, the PF effect is no more present




---

---

---

---

---

---

---

---

---

---









Scheduling in HCCA:  
Sample Open and Close-Loop Schedulers

---

---

---

---

---

---

---

---

Outline

- Scheduling: The Rules of The Game
- Sample (on the standard) Scheduler
- Equivalent Bandwidth Approach
- Closed Loop Scheduling: A Control Theoretic Approach

---

---

---

---


---

---

---

---

MAC 802.11e: HCCA

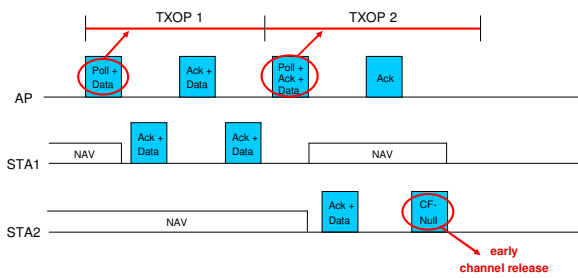


---

---

---

---

---

---

---

---

## Resource Scheduling (2)

- KEY notions are
  - Service Interval -  $SI(j)$ : The maximum amount of time between successive polling to a station  $j$
  - Transmission Opportunities -  $TXOP(j)$ : The amount of resources (time) assigned to station  $j$  in a single polling
- Goals of scheduling:
  - Find suitable values of SIs and TXOPs
  - Fully exploit resources
  - Guarantee quality and differentiation of the TSPECs




---

---

---

---

---

---

---

---

---

---

## Reference Implementation (SS)

Service Interval  $m = \min(\text{MaximumServiceInterval}_i)$

$$SI = \max(x) \text{ t.c. } x < m \text{ e } BI \bmod x = 0$$

TXOP  $N_i = \left\lceil \frac{SI \times \rho_i}{L_i} \right\rceil$

$$T_i = \max\left(\frac{N_i \times L_i}{R} + O, \frac{M_i}{R} + O\right)$$

- $\rho_i$  Mean datarate
- $L_i$  Nominal MSDU size
- $M_i$  Maximum MSDU size
- $R$  TX rate
- $O$  Overhead (Ack, SIFS,...)




---

---

---

---

---

---

---

---

---

---

## Feedback Information ... or not?

- SS Schedules is open-loop:
  - Uses only TSPEC info
  - Assigns the mean rate: not suited for VBR ...
  - ... but you can assign a rate based on an **Equivalent Bandwidth** approach
- 802.11e has a field to feedback information about backlog (bytes or frames in queue)
  - Use this info for prediction or
  - Use this info for **closed-loop control**?




---

---

---

---

---

---


---

---

---

---

## Open/Closed Loop Scheduling

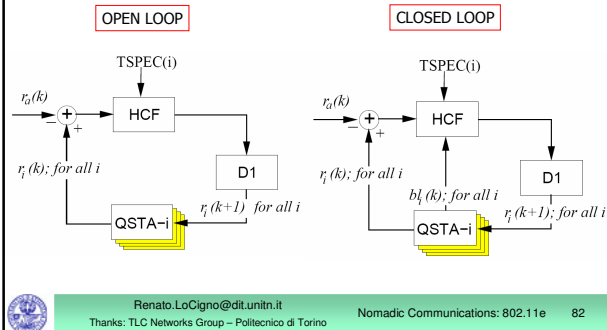


---

---

---

---

---

---

---

---

---

---

## Equivalent Bandwidth

- Well known approach
  - Conceptually simple, just assign resources such that

$$P\left[\frac{\rho}{SI} > \frac{EB(p)}{SI}\right] = p$$

- EB(p) is the assignment that guarantees p frame loss probability
- $\rho$  is the actual (time-dependent) offered traffic
- **But ...** requires full stochastic knowledge of the traffic ☹

---

---

---

---

---

---

---

---

---

---

## Closed-loop Scheduling: Basics

- Discrete time modeling
  - Just throw away time (creates a lot of problems)
  - The system evolves in cycles of SIs: 1,2,3,...,k
- Goal: equalize (to zero) all queues
- Max/Min fair approach
  - Only resources above the minimum guarantee are "controlled"
- Assumption: There is a CAC function ensuring long-term stability
  - Can use large loop gains without oscillation risks

---

---

---

---

---

---

---

---

---

---

### Closed-loop Scheduling: Formulae

$$\frac{1}{K} \sum_{k=1}^K r_a(k) > \sum_{i=1}^{N_{QS}} r_i$$

CAC based long term stability:  
the average available resources  
over a finite time K are larger  
than the average assigned resources

$$r_j(k) = r_j^{\min}(k) + r_j^+(k)$$

$$r_j^+(k+1) = \frac{B_j(k)}{\sum_{j=1}^{N_{TS}} B_j(k)} \left[ r_a(k+1) - \sum_{j=1}^{N_{TS}} r_j^{\min}(k+1) \right]$$



Renato.LoCigno@dit.unitn.it  
Thanks: TLC Networks Group – Politecnico di Torino

Nomadic Communications: 802.11e 85

---

---

---

---

---

---

---

---

### Closed-loop Scheduling: Formulae

$$\frac{1}{K} \sum_{k=1}^K r_a(k) > \sum_{i=1}^{N_{QS}} r_i$$

Max/Min Fairness  
 $r^{\min}$  are guaranteed  
and not subject to control  
 $r^+$  is strictly non negative

$$r_j(k) = r_j^{\min}(k) + r_j^+(k)$$

$$r_j^+(k+1) = \frac{B_j(k)}{\sum_{j=1}^{N_{TS}} B_j(k)} \left[ r_a(k+1) - \sum_{j=1}^{N_{TS}} r_j^{\min}(k+1) \right]$$



Renato.LoCigno@dit.unitn.it  
Thanks: TLC Networks Group – Politecnico di Torino

Nomadic Communications: 802.11e 86

---

---

---

---

---

---

---

---

### Closed-loop Scheduling: Formulae

$$\frac{1}{K} \sum_{k=1}^K r_a(k) > \sum_{i=1}^{N_{QS}} r_i$$

Simple proportional controller  
splitting excess resources  
among all the flows that are  
backlogged

$$r_j(k) = r_j^{\min}(k) + r_j^+(k)$$

$$r_j^+(k+1) = \frac{B_j(k)}{\sum_{j=1}^{N_{TS}} B_j(k)} \left[ r_a(k+1) - \sum_{j=1}^{N_{TS}} r_j^{\min}(k+1) \right]$$



Renato.LoCigno@dit.unitn.it  
Thanks: TLC Networks Group – Politecnico di Torino

Nomadic Communications: 802.11e 87

---

---

---

---

---


---

---

---

## Details ... the real doom!

- Highly quantized resource assignment
  - A minimum assignment of one maximum size segment is mandatory ... what if the station transmits at low rate?
  - "Fragments" of frames might lead to waste resources
- Reaction of the controller can be sluggish

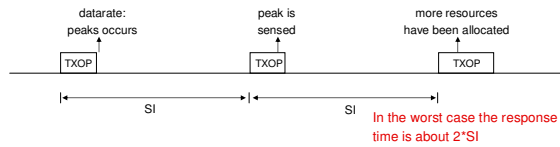


---

---

---

---

---

---

---

---

---

---

## Closed-loop Schedulers

- MMF-A
  - Implements the formulae above
  - Have quantization and response problems
- MMF-AR
  - Dynamically changes the SI 'on-demand' ☺
  - Reassign spare resources at the end of the CFP
  - Violates proportional assignment to avoid quantization problems

---

---

---

---

---

---

---


---

---

---

## Results

Traffic VBR-3: both packet size and interarrival time change  
 Delay Bound =  $\infty$  Buffer Size = 50 pck Service Interval = 50 ms

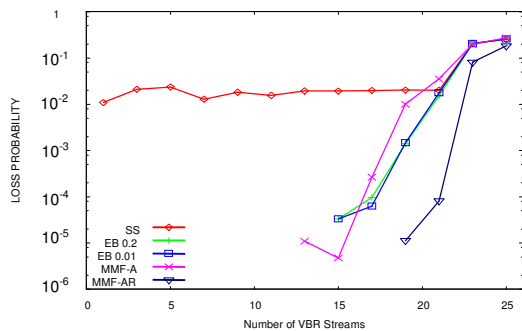


---

---

---

---

---


---

---

---

---

---

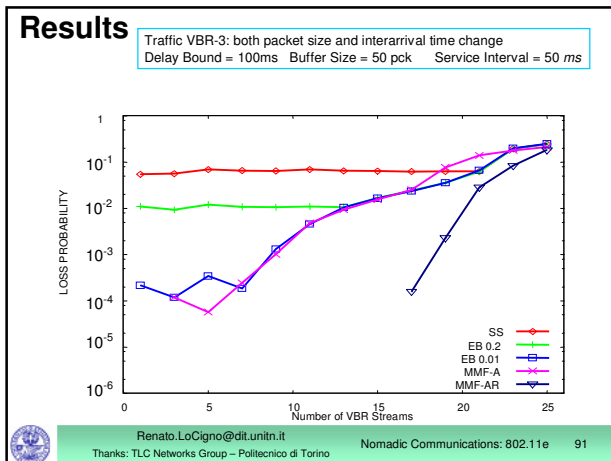


---

---

---

---

---


---

---

---

---

---

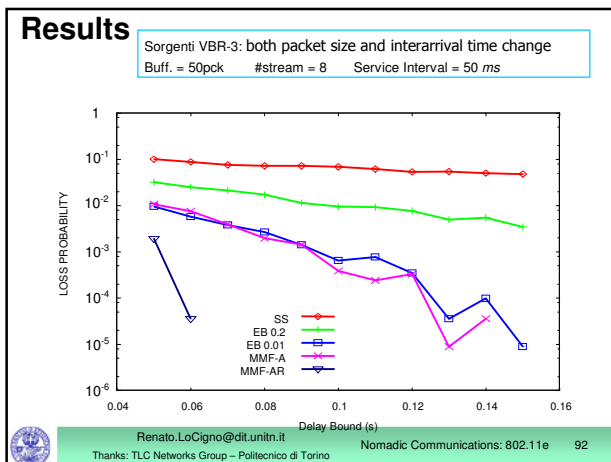


---

---

---

---

---


---

---

---

---

---

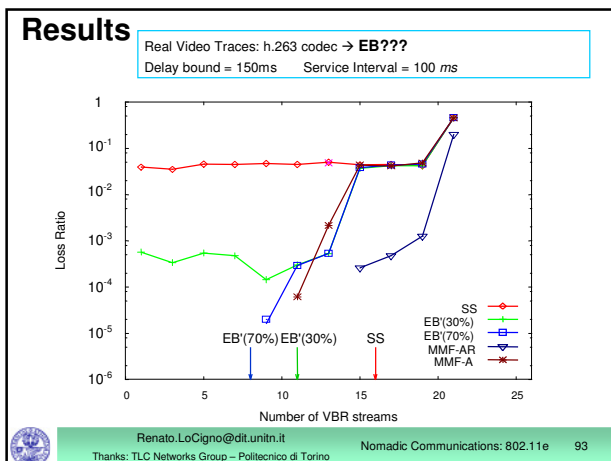


---

---

---

---

---

---

---

---

---

---

## Conclusions

- Different HCCA scheduling explored
- HCCA complexity is manageable, performances are better than EDCA, configuration is easier
- Closed-loop scheduling:
  - Viable alternative to open-loop or predictive scheduling
  - Complexity much simpler and effective than Equivalent Bandwidth approaches
- The BIG problem are details
  - Quantization, Normalization, Spare Resource Collection, ...



---

---

---

---

---

---

---

---