

Wireless Mesh Networks

Renato Lo Cigno
www.dit.unitn.it/locigno/didattica/NC/

Part of this material (including some pictures) features and are freely reproduced from:
"Jan F.Akyildiz, Xudong Wang, Weilin Wang, 'Wireless mesh networks: a survey', Computer Networks 47 (2005), Elsevier"

Thanks also to Gianni Costanzi for checks and providing figures

Ad-Hoc and WMN


- Ad-Hoc network
 - non permanent
 - general purpose or specific (sensors)
 - single or multi-hop, normally mobile
 - may require routing (see AODV and OLSR in the following)
- Wireless Mesh Networks (WMN)
 - more structured than Ad-Hoc
 - may be hierarchical
 - semi-permanent, some nodes are fixed
 - requires routing




WMN: a general view




A Mesh – Ad-hoc network

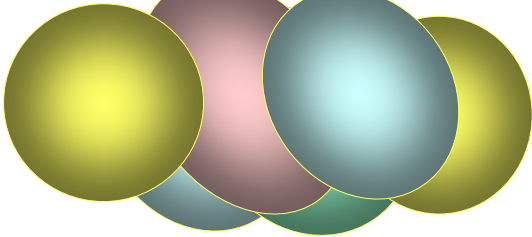


- Ad-Hoc can be meshed
 - non single broadcast channel
 - multi-hop require routing

 Renato.LoCigno@dit.unitn.it Nomadic Communications: Wireless Mesh Networks 4


Hierarchical meshes



 Renato.LoCigno@dit.unitn.it Nomadic Communications: Wireless Mesh Networks 5

Hierarchical meshes

- Capacity of the backbone
- Routing strategies
 - Gateway selection
 - client level
 - backbone level
- Backbone of fixed nodes
 - multi-km links → easy and cheap coverage
 - replace wireless "closed" backbones
 - Nomadic access vs. static access

 Renato.LoCigno@dit.unitn.it Nomadic Communications: Wireless Mesh Networks 6

Domestic Mesh

- Simplify home cabling
- Can support anti-intrusion
- Distribute e.g. IPTV

Renato.LoCigno@dit.unitn.it Normadic Communications: Wireless Mesh Networks 7

Building automation


- Simplify cabling
- Allow central control
 - vs. pure sensor/actuator networking where information is not propagated
- Simple, static routing
- Reliability concerns

Renato.LoCigno@dit.unitn.it Normadic Communications: Wireless Mesh Networks 8

Multi-home meshes


- Community networks
- Social networks
- SOHO support
- Nomadic access

Renato.LoCigno@dit.unitn.it Normadic Communications: Wireless Mesh Networks 9

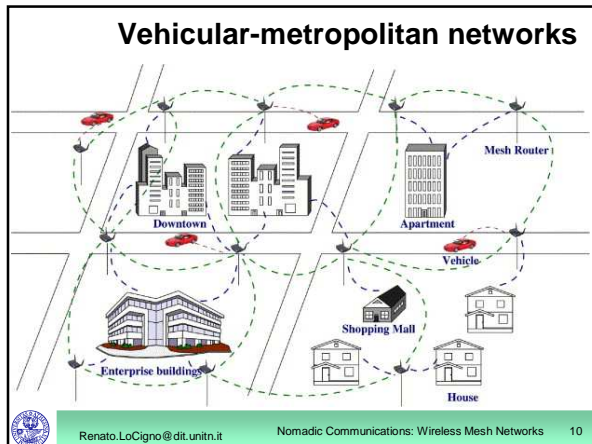

- ### Vehicular-metropolitan networks
- Mainly infrastructure-to-vehicle
 - cooperative driving is a different (though related) story
 - Traffic control & congestion management
 - A22 is "selling" as the "future" 73 messaging panels on close to 300 km ...
 - Tourism, advertisement, local information
 - Nomadic communication with pedestrians too

 - In U.S. some commercial experiments are already available
- Renato.LoCigno@dit.unin.it Nomadic Communications: Wireless Mesh Networks 11

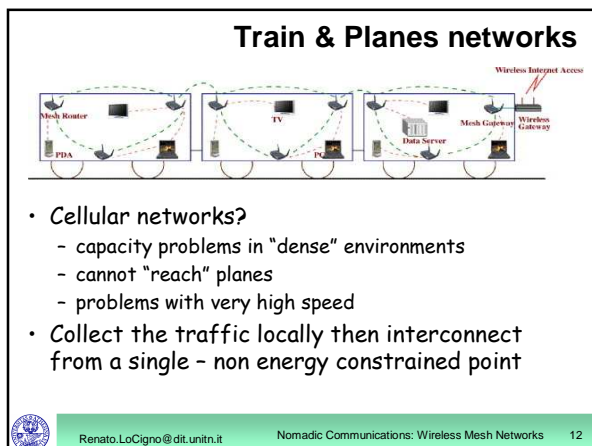

Mesh project & sites

- Community Networks & around
 - Seattle Wireless (<http://www.seattlewireless.net/>)
 - Roofnet at MIT (<http://pdos.csail.mit.edu/roofnet/>)
 - TFA at Rice (<http://tfa.rice.edu>)
 - Tuscolo Mesh (<http://tuscolomesh.ninux.org/joomla>)
 - Georgia Tech (<http://www.ece.gatech.edu/research/labs/bwn/mesh/index.html>)
 - ...
 - Pergine Valsugana
 - ...
 - Trentino Networks




Renato.LoCigno@dit.unitn.it

Nomadic Communications: Wireless Mesh Networks

13

Mesh: Basic scenarios (1)



- Extended WLAN access
- Simple configuration
 - no routing
- Simple 802.11 handover support
- Double radio guarantees good performance

- Single radio creates resource conflicts
 - 3 BSS on the same channel
 - suitable for low-cost low-performance




Renato.LoCigno@dit.unitn.it

Nomadic Communications: Wireless Mesh Networks

14

Mesh: Basic scenarios (2)



- WDS is broadcast
- A(GW) can be a bottleneck

- Extended WLAN access
- Routing required
- Simple 802.11 handover support
- Double radio guarantees good performance

- Single radio creates serious resource conflicts
 - $n+1$ BSS on the same channel



Renato.LoCigno@dit.unitn.it

Nomadic Communications: Wireless Mesh Networks

15

Mesh: Basic scenarios (3)

The diagram shows a central cloud labeled 'Internet gateway (GSM, 3G, 4G, etc.)'. Below it are two gateways labeled 'GN'. A mesh of nodes is connected to these gateways. A laptop is shown at the bottom left, with a red arrow pointing right, indicating movement or data flow.

Renato.LoCigno@dit.unitn.it Nomadic Communications: Wireless Mesh Networks 16

Mesh: Basic scenarios (3)

The diagram shows a central cloud labeled 'Internet gateway (GSM, 3G, 4G, etc.)'. Below it are two gateways labeled 'GN'. A mesh of nodes is connected to these gateways. A laptop is shown at the bottom left, with a red arrow pointing right, indicating movement or data flow.

- Extended WLAN access
- Basic infrastructuring
- Single radio operation very difficult

- Multiple external gateways
 - sophisticated, flow-based routing
- Non standard handover support
 - flow based routing requires exporting the context
 - address management require coordination
- WDS may be multi-hop
 - How many channels?
- Point-to-point and broadcast channels in WDS

Renato.LoCigno@dit.unitn.it Nomadic Communications: Wireless Mesh Networks 17

Mesh: Basic scenarios (3)

The diagram shows a central cloud labeled 'Internet gateway (GSM, 3G, 4G, etc.)'. Below it are two gateways labeled 'GN'. A mesh of nodes is connected to these gateways. A laptop is shown at the bottom left, with a red arrow pointing right, indicating movement or data flow. A yellow box highlights the text: 'Moving between BSS belonging to different Mesh/WDS'.

- Address management (DHCP) is a problem
- Flow-based routing may be impossible
- Joining/splitting of partitions is an open issue

Renato.LoCigno@dit.unitn.it Nomadic Communications: Wireless Mesh Networks 18

Mesh – Ad-Hoc: AODV

Ad-hoc On-demand Distance Vector routing - rfc3561

- DV (see RIP) protocol for next-hop based routing
- On-Demand: maintains routes only for nodes that are communicating
- Must build routes when requested
- Route Request (RREQ) are flooded through the network
- Nodes set-up reverse path pointers to the source
 - AODV assumes symmetric links



Mesh – Ad-Hoc: AODV

- The intended receiver sends back a Route Reply (RR)
- RR follow the reverse path set-up by intermediate nodes (unicast) establishing a shortest path route memorized by intermediate nodes
- Paths expire if not used
 - protocol & transmission overhead
 - guarantee of stability in dynamic, non reliable networks
- Usual DV problems
 - count to infinity, slow convergence, ...



Mesh – Ad-Hoc: AODV

- Next-hop based (other proposals are based on source routing)
- "Flat" protocol: all nodes are equal
- Can manage only one route per s-d pair
 - can be inefficient in presence of highly variable link quality and persistence
- Good for sporadic communications
- Bad for high mobility
 - slow convergence
 - difficulty in understanding topology changes.



Mesh – Ad-Hoc: AOMDV

Ad-Hoc On-demand Multipath Distance Vector Routing in Ad Hoc Networks

- An extension to AODV
- AOMDV computes multiple loop-free and link-disjoint paths
- Using "Advertised Hop-count" guarantees Loop-freedom
 - A variable, which is defined as the maximum hop count for all the paths. A node only accepts an alternate path to the destination if it has a lower hop count than the advertised hop count for that destination
- Link-disjointness of multiple paths is achieved by using a particular property of flooding
- Performance comparison of AOMDV with AODV shows that
 - AOMDV improves the end-to-end delay, often more than a factor of two
 - AOMDV reduces routing overheads by about 20%



Mesh – Ad-Hoc: OLSR

Optimized Link-State Routing Protocol (rfc3626)

- Proactive, link-state routing protocol
- Based on the notion of MultiPoint Relay (MPR)
- Three main components:
 - Neighbor Sensing mechanism
 - MPR Flooding mechanism
 - topology Discovery (diffusion) mechanism.
- Auxiliary features of OLSR:
 - network association - connecting OLSR to other networks



Mesh – Ad-Hoc: OLSR

Basic neighbor sensing:

- periodic exchange of HELLO messages;
- HELLO messages list neighbors + "neighbor quality"
 - HEARD - link may be asymmetric
 - SYM - link is confirmed to be symmetric
 - MPR - link is confirmed to be symmetric AND neighbor selected as MPR
- Providing:
 - topology information up to two hops
 - MPR selector information notification



Mesh – Ad-Hoc: OLSR

- Each node selects from among its neighbors an MPR set such that
 - an emitted flooding message, relayed by the MPR nodes, can be received by all nodes in the 2-hop neighborhood
- Goals:
 - reduce flooding overhead (select minimal sets)
 - provide optimal flooding distances



Mesh – Ad-Hoc: OLSR

- Exchanges topology information with other nodes of the network regularly
- MPRs announce their status periodically in control messages.
- In route calculation, the MPRs are used to form the route from a given node to any destination in the network
- Uses MPRs to facilitate efficient flooding of control messages



Mesh Networks: 802.11s

- Working group to deliver a standard for 802.11(& around) base Mesh Networks
 - Interactions with 802.11p dedicated to vehicular networks
- Tries to define a framework to support a Mesh network as a standard extended WLAN with routing that goes beyond the standard minimum spanning tree of 802.11 interconnection



Device Classes in 802.11s

- **Mesh Point (MP)**
 - a point able to relay messages
- **Mesh AP (MAP)**
 - a MP able to provide services to STAs
- **Mesh Portal (MPP)**
 - a MAP connected to a wired LAN
 - normally called a gateway and assumed to access the internet



Renato.LoCigno@dit.unitn.it

Nomadic Communications: Wireless Mesh Networks 28

Routing in 802.11s

- **Hybrid Wireless Mesh Protocol (HWMP) - Mandatory**
 - AODV derived link-state protocol
 - Based on trees for proactive and efficiency
 - Add on-demand features (like AODV)
- **Radio Aware OLSR (RA-OLSR) - Optional**
 - Radio aware metrics added to MPRs in OLSR
 - optional fish-eye routing capabilities
 - association and discovery protocols for topology discovery and buildup



Renato.LoCigno@dit.unitn.it

Nomadic Communications: Wireless Mesh Networks 29
